


MAGNUM .25 LONG BOLT

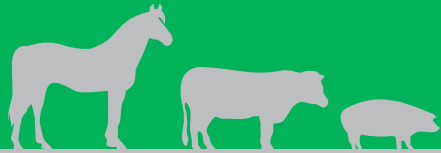

accles
&SHELVOKE
Since 1913

July 2013

To whom it may concern,

Please find below key parameters relating to Accles & Shelvoke humane stunners.

This information is issued to help business operators comply with EU Council Regulation 1099/2009. The regulation is open to interpretation, but Accles & Shelvoke, with years of market experience, has developed the following parameters.

These figures may only be used when quoted with the associated notes. Accles & Shelvoke will not accept responsibility for the provenance of these figures if used out of context.

TOOL	Cartridge (Grains (Nominal))	Accles & Shelvoke Cartridge (Colour)	Bolt Diameter (mm)	Average Bolt Velocity* (m/s)	Exit Length** (Minimum) (mm)	Energy Generated (J)
Magnum .25" Long Bolt	1.25	Pink	11.91	39.33	95	199
Magnum .25" Long Bolt	2	Yellow	11.91	48.21	95	299
Magnum .25" Long Bolt	3	Blue	11.91	53.41	95	367
Magnum .25" Long Bolt	3.5	Orange	11.91	56.97	95	417
Magnum .25" Long Bolt	4	Black	11.91	64.83	95	540
Magnum .25" Long Bolt	4.5	Green	11.91	65.73	95	555

Notes

* When measured in air over a distance of 47mm, 15mm from the muzzle of the tool.

** When fired in air.

Figures quoted are using a stunning tool in good condition and verified on an Accles & Shelvoke Universal Stun Check.

On behalf of Accles & Shelvoke Limited

Andrew Lane
Managing Director

IMI

Registered in England No. 220533
Accles & Shelvoke Limited is a subsidiary company of IMI plc

Contact us today to find out how Accles & Shelvoke can help your current or future stunning requirements.

Accles & Shelvoke Ltd, Selco Way, Off First Avenue, Minworth Industrial Estate,
Sutton Coldfield, West Midlands, B76 1BA, UK

Website: www.acclesandshelvoke.co.uk

Email: info@acclesandshelvoke.co.uk

Telephone: +44 (0)121 313 4567

Fax: +44 (0)121 313 4569